

ANTIKA CUBE



ANTIKA CUBE


| | |
|-----------------------------|---|
| Material | steel profiles 35 × 35 mm / steel profiles 70 × 11 mm |
| Connection thread | 2 × G1/2" |
| Testing overpressure | 0,65 MPa |
| Max. operating overpressure | 0,5 MPa |
| Max. operating temperature | 110 °C |
| Number of profiles | 10, 14, 20 |



ANTIKA CUBE 1800 × 415

| Type H/L [mm] | Depth B [mm] | Weight [kg] | Water capacity [l] | Temperature exponent [n] | Heating Output [W] | | | Recommended power input | | Connection span [mm] |
|---------------|--------------|-------------|--------------------|--------------------------|--------------------|-------------|-------------|-------------------------|------------|----------------------|
| | | | | | 75/65/20 °C | 70/55/20 °C | 55/45/20 °C | paint [W] | chrome [W] | |
| 1800/295 | 104 | 35,7 | 10,1 | 1,25 | 1111 | 907 | 587 | - | - | mc 50 |
| 1800/415 | 104 | 49,8 | 14,2 | 1,25 | 1556 | 1270 | 822 | - | - | mc 50 |
| 1800/595 | 104 | 71,2 | 20,3 | 1,25 | 2223 | 1814 | 1174 | - | - | mc 50 |

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.

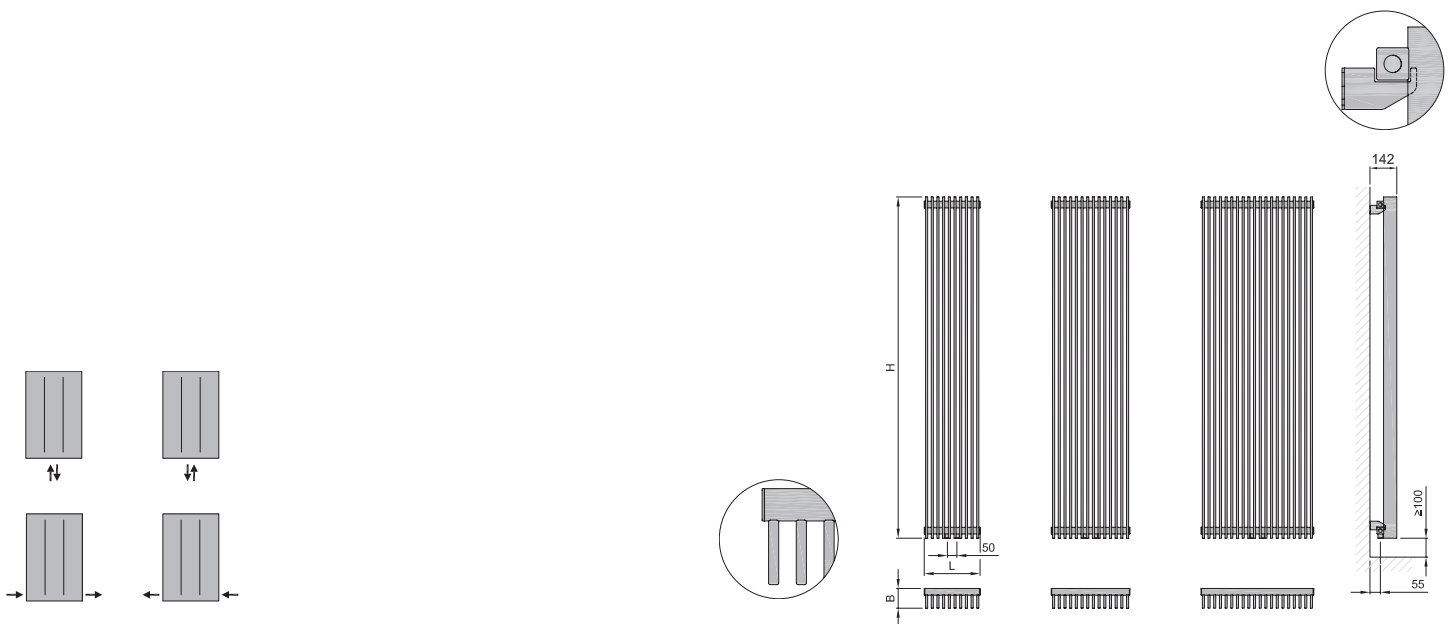

Connection options

DANC 1800 0295...

DANC 1800 0415...

DANC 1800 0595...